

ERASER

Always Moving Forward[®]

***Superior Industrial Solutions in
Wire, Cable and Tube Processing***

**Made in Syracuse.
Used around the world.**
eraser.com • ISO registered



THE ERASER COMPANY, INC.

SUPERIOR INDUSTRIAL SOLUTIONS IN WIRE, CABLE AND TUBE PROCESSING

OUR HISTORY

From The Eraser Company, Inc.'s founding in 1911 through its incorporation in 1935, The Rush FybRglass Eraser® was the company's lone manufactured product. Then came the 1940s and the discovery that the eraser could be used not only for typing and drafting correction, but to strip film insulation from magnet wire – the birth of an industry.

As the innovator of a whole line of magnet wire strippers, we have continued to expand and refine our product offerings. In the past 20 years, we have brought to market all types of wire, cable and tubing cutters, wire and cable strippers, wire twisters, wire brush wheels, reelers and dereelers, infrared heating equipment, measuring tools and fybRglass® erasers.

The Eraser Company, Inc. attained ISO certification in February of 1996, thus underscoring our commitment to providing our customers with reliable, high-quality products. Much of our product line meets CE standards; indeed, CE requirements inform new product design. Our ISO-certified commitment to continual improvement inspires us to include many new features and upgrades to our existing equipment offerings.

CERTIFICATION PROGRAM

How do we deliver on the commitment? We offer ECP (Eraser Certification Program).

Send us 10-15 feet of your material; we'll process it according to your specifications and return it to you with a recommendation for the ultimate solution for your processing needs. If your solution is not part of our extensive product line, our highly skilled engineers can custom-design one for you. Further, if we can't do it, we'll tell you who can! There is no better service out there.



CUSTOMIZED SOLUTIONS

Most needs can be met by our line of over 200 products. For those special applications, we offer state-of-the-art design software and a team of engineers to customize a solution for you. Thousands of satisfied customers across the globe can attest to our one-of-a-kind, built-to-order approach to their toughest challenges.



Whether you are one of our long-standing customers or just beginning your partnership with us, The Eraser Company, Inc. looks forward to serving you. Call today, as we are...

...ALWAYS MOVING FORWARD!



"Eraser matched us with a custom made, high quality processing solution that has not only improved our business but has also saved us time, money and unnecessary processing headaches!

We've improved our production capabilities by 200%!"

Frank Evancich

Klode Salvage Distribution Center, Inc. ~ Denver, CO

Eraser Cleaning and Burnishing brushes are made from coarse or fine grade FybRglass®, Brass, Nylon and Stainless Steel. These tools are suitable for a wide variety of cleaning, burnishing and polishing applications including electrical contact cleaning, mold cleaning, rust removal, deburring small metal parts, erasing printing marks, cleaning contact pads and fingers of printed circuit boards, and much more. Custom designed brushes for your process can be quoted upon request.

FybRglass® Erasers and Brushes



A range of refillable cleaning tools using brushes made from coarse and fine grade FybRglass®, brass, nylon, and stainless steel. Available with a plastic protective coating or all metal construction body. Sold individually or in a kit that contains five tools with brushes made from brass, stainless steel, nylon, coarse and fine FybRglass®.

Pen Type Erasers

Ordering Information

FybRglass® Eraser and Refills (With Pen Clip)

AA0120.....(Red) Metal Body with Fine FybRglass®
IA0380.....Fine FybRglass® refills (each)
AA0019..... Fine FybRglass® refills (packet of 25)

AA0020.....(Blue) Metal Body with Coarse FybRglass®
IA0006..... Coarse FybRglass®refills (each)
AA0014..... Coarse FybRglass® refills (packet of 25)

FybRglass® Silver Color only, (Without Pen Clip)

AA2120..... Metal Body with Fine FybRglass®
AA2020..... Metal Body with Coarse FybRglass®

Pen Type Erasers (Cont'd)

Ordering Information

Brass Erasers (With Pen Clip)

AA0004.....(gold) Metal Body Brass eraser
IA0370.....Brass refills (each)

Stainless Steel (With Pen Clip)

AA0003(E116) Stainless Steel Metal Body eraser
IA0360..... Stainless Steel refills (each)

Nylon Eraser (With Pen Clip)

AA0005 (E126) (black) Metal Body Nylon Eraser
IA0410 (E124) Nylon refills (each)

Metal Body Brush Kit (With Pen Clips)

AA0124 (EKIT)..... Kit of 5 Metal Body erasers
(one each of Stainless Steel, Fine FybRglass®, Brass, Nylon,
and Coarse FybRglass®)




**Metal Body FybRglass®
Brush (With Clip)**



Abraser Brush

Eraser Stick Brushes

Stick and Abraser brushes with plastic protective covering that is cut back as brush wears. FybRglass® brushes are manufactured from spun glass in two grades of material, coarse and fine. Brushes will not alter electrical properties or contaminate surfaces cleaned.



Ordering Information

Stick Brushes, 5-1/2" long (140mm)

AA0104 (BR0/F) Fine stick brush 1/4" OD
(6mmø), (red)
AA0022 (BR1/F) Fine stick brush 5/8" OD
(16mmø), (red)
AA0023 (BR2/F) Fine stick brush 1" OD
(25mmø), (red)
AA0130 (BR0/C).....Coarse stick brush 1/4" OD
(6mmø), (blue)
AA0129 (BR1/C).....Coarse stick brush 5/8" OD
(16mmø), (blue)
AA0128 (BR2/C).....Coarse stick brush 1" OD
(25mmø), (blue)

All Stick Brush Kit

AA0123 (BRKIT)..... One each of the stick brushes
(listed above)

Abraser brushes are 7/8" (22mm) long

AA0610 (ABR3F)Fine grade abraser (red)
AA0600 (ABR3C)Coarse grade abraser (blue)

EKIT Metal Body Brushes




Ordering Information

AA0124 (EKIT)..... (Set of 5) Metal Body Brush Kit
This handy cleaning tool kit comes complete with 1-each of our famous; Fine FybRglass®, Coarse FybRglass®, Brass, Stainless Steel, and nylon brush.

All (Pen Style)Metal Body Brush, Refills Only

- IA0380 Fine FybRglass® refills (each)
- AA0019 Fine FybRglass® refills (packet of 25)
- IA0006 Coarse FybRglass® refills (each)
- AA0014 Coarse FybRglass® refills (packet of 25)
- IA0360 Stainless Steel refills (each)
- IA0370 Brass refills (each)
- IA0410 Nylon refills (each)

Rotary FybRglass® Cleaning Wheel

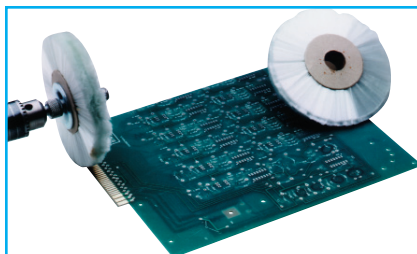

Filled with pure spun fine grade FybRglass® fibers with no bonding agent this wheel is designed for rotary use mounted on spindles or mandrels. Wheels may be stacked

together on a spindle to produce a wide face brush. The safe maximum free speed for the CP154 is 2,000 RPM.

Ordering Information

BE0002 FybRglass® Wheel
4" OD x 2.5" wide width (101mm OD x 63.5mm wide) with 3/4" arbor hole (19mmø)

All Kit

The ultimate brush kit, containing all of the industrial brushes except the ECT1, provides the opportunity to evaluate all the brushes and have on hand the solution to many cleaning, polishing, and burnishing problems at all times.

Ordering Information

AA0012 (ALLKIT)..... Kit of all brushes

BR4 Metal Cased Brushes

An adjustable metal cased brush. The brush is propelled from the case by a turn of a knob to compensate for wear.




Eraser FybRglass® Brushes will not alter electrical properties or contaminate surfaces cleaned. Overall length of brush is 4" (102mm), cleaning surface is 1-3/8" x 3/8" (35mm x 9.5mm), and usable brush length is 2-3/4" (69mm).

Ordering Information (BR4 Metal Case)

- AA0024 (BR4/F) Metal cased brush (red) with fine grade material
- AA0025 (BR5/F) Fine refill for BR4/F (one set)
- AA0127 (BR4/C)..... Metal cased brush (blue) with coarse grade material
- AA0131 (BR5/C)..... Coarse refill for BR4/C (one set)

BR9 PCB Board Brush

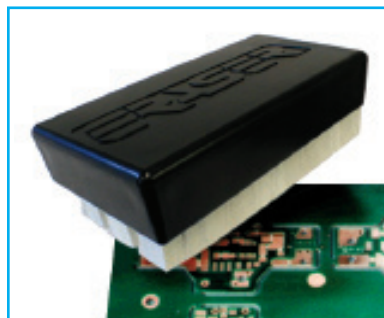

Hand held power brush for cleaning and burnishing non-populated printed circuit boards or large areas.

A gentle brushing action will remove oxidation from copper and soldered surfaces. No water or solvent is required.

The cleaning surface of the BR9 measures 2" x 3.5" (51mm x 89mm).

Ordering Information

AA0026 (BR9)..... Hand brush — fine grade FybRglass®

All Kit



FC10 & HC10 Cable Cutters



Whether the foot-operated FC10 or the hand-operated HC10, these cutters provide clean, square cutting of a variety of different wires and cables.

Specifications

Max. blade opening..... 1.00" diameter (31.75mm)
Min. material size 0.010" diameter (0.254mm)

Ordering information

AR5700 (HC10)..... hand operated
AR5800 (FC10) foot operated
IR8775conversion kit, changes HC10 to FC10

MR30A Handheld Air-Operated Cutter



Lightweight and powerful, this air-operated cutter uses 70-90 PSI to create up to 617 pounds of cutting force.

Specifications

Max. wire size.....0.130" OD (3.3mmø) copper
0.110" OD (2.79mmø) steel
0.047" OD (1.19mmø) piano wire
Tool dimensions.... 7" (177.8mm) long, 2.20" OD (56mmø)
Tool weight 1.2 lbs. (0.544 Kg)
Air connection..... 1/4" NPT

Ordering information

DE0009 (MR30A)..... 90 PSI
CL0149 blade for center cuts
CL0158blade for end cuts
CL0159 carbide tipped blade for diagonal cuts

Eraser offers reelers, dereelers, winders and measuring tools for a broad range of wire and cable handling needs. Manual or compensating reelers and dereelers and measuring tools work with Eraser cable processing units to provide complete combinations of material handling equipment.

CW10 Small Reeler and Dereeler



A collapsible reeler with friction clutch for a variety of wire and cable also dereels hanks or coils of material by reversing the reeling operation.

Specifications

Coil Dimension:
Inside Diameter Variable 5" (127mmø) to 12" (305mmø)
Unit may be set and locked for a specific diameter
Capacity:
Length Up to 1000' (305M) of 1/8" (3.18mmø) diameter wire or equivalent.
Weight of Coil 55 lbs. (25 Kg) maximum

Ordering information

AR6001 (CW10) Small Reeler and Dereeler
Optional Parts
IR0491 (Bench Stand)..... For use with reelers, dereelers and measuring meters
IR0492 (Floor Stand) For use with reelers, dereelers and measuring meters

CW20 Medium Reeler and Dereeler



The unit has a friction clutch, making it ideal for dereeling, measuring, cutting and reeling operations by production kitters, jobbers, and electrical contractors.

Specifications

Coil Dimension:
Inside Diameter Fixed at 12" (305mmø)
Outside Diameter Variable up to 21" (419mmø)
Width of Coil:
At Inside Diameter Up to 3 1/2" (89mm)
At Maximum Outside Diameter Up to 7 1/2" (191mm)
Capacity:
Length Up to 1200' (366M) of 1/4" (6.35mmø) diameter wire or equivalent.
Weight of Coil 60 lbs. (27.3 Kg) maximum

Ordering information

AR7001 (CW20) Medium Reeler and Dereeler
Optional Parts
IR0491 (Bench Stand)..... For use with reelers, dereelers and measuring meters
IR0492 (Floor Stand) For use with reelers, dereelers and measuring meters

CW30 Large Reeler and Dereeler



This collapsible unit reels or dereels coils of wire or cable. An adjustable friction clutch is incorporated to prevent overruns in dereeling operations.

Specifications

Coil Dimension:
 Inside Diameter Fixed at 27" (686mmø)
 Outside Diameter Variable up to 36" (914mmø)
 Width of Coil:
 At Inside Diameter Up to 6 1/4" (159mm)
 At Maximum Outside Diameter Up to 9 1/2" (241mm)
 Capacity:
 Length Up to 300' (91M) of 3/4" (19mmø) diameter wire or equivalent.
 Weight of Coil 150 lbs. (68.2 Kg) maximum

Ordering information

AR8001 (CW30) Large Reeler and Dereeler

Measuring Meters



Designed to measure long lengths of wire, cable, flat cable and other flexible material, a digital counter records the amount of measured material.

Specifications

Measure rates up to 1,000 feet (305M) per minute
 Material size Flexible material from 1/64" (0.40mm) to 2" (50.8mm) dia. or width
 Readout feet and inches to 9,999'11" or meters and 1/10 meters to 9,999.9M
 Accuracy ±.5% depending on material and feed

Ordering information

AR0610 (WMI) Measuring meter (feet/inches) steel rollers
 AR0620 (WMM) Measuring meter (meters) steel rollers
 AR0630 (WMIU) Measuring meter (feet/inches) urethane rollers
 AR0640 (WMMU) Measuring meter (meters) urethane rollers
 AR0650 (WMIG) Measuring meter (feet/inches) abrasive coated rollers
 AR0660 (WMMG) Measuring meter (meters) abrasive coated rollers

Optional Parts

IR0491 bench stand
 IR0492 adjustable floor stand

Wire Straightner



This unit is for use with all wire cutters, or it can be used serperatly. The maximum opening between rollers is 3/8" (9.5mm)


Specifications

Wire Sizes Maximum opening between the straightening rollers is 3/8" (9.5mm). Wire size is dependent on flexibility and degree of straightness.
 Minimum opening between the straightening rollers is zero
 Size 5-3/8" x 3-3/8" x 2-3/4" (136mm x 85mm x 70mm)
 Weight 3 1/4 pounds

Ordering information

AR3950 (WS1) Wire Straigtner

DE600 Dereeler & Winder

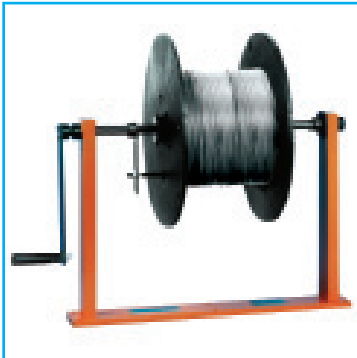

Versatile manual dereeler and reeler, for reel sizes up to 29 feet. An adjustable friction clutch assembly prevents overruns. Unit can be floor or bench mounted.

Specifications

DE600 Max. reel width14-3/4" (365mm)
 Max. reel dia.....29" OD (737mmø)
 Reel arbor diameter3/4" to 2-1/8" (19mmø to 54mmø)

Ordering Information

AR5600 (DE600) Manual dereeler and winder

DE300 Reel Lifter and Dereeler



Utilizing the help of leverage, these units enable two people to set up reels over 2000 lbs. (909 Kg) in weight.

Specifications

DE300 Max. reel width31" (787mm)
 DE300 Max. reel dia..... 48" (1219mmø)
 Min. reel arbor dia 1-11/16" (43mmø)

Ordering information

AR5300 (DE300)Cable reel lifter and dereeler

DE700 Compensating Dereeler



By providing fine adjustment control on the reel payout tension, this compensating dereeler prevents material overruns when used with wire cutters or cut and strip machines.


Specifications

Max. reel diameter16-1/2" OD (419mmø)
 Max. reel weight.....100 lbs. (45Kg)
 Reel hub diameter5/8" to 1-3/16" OD
 (16mm to 30mmø)
 Max. reel width10-1/4" (260mm)

Ordering information

AR0170 (DE700) Compensating dereeler

DE100 Turntable Dereeler

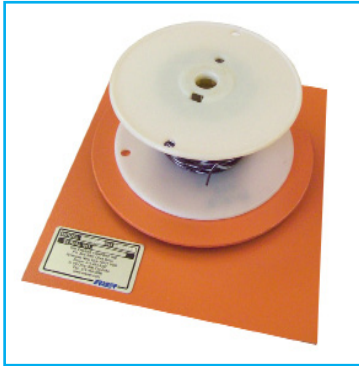

The single station turntable will accommodate a reel up to 100 lbs. (45 Kg).


Specifications

Turntable Diameter 8" (203mmØ)
Overall Size 9" x 10-1/2"(229mm x 267mm)
Max. reel weight..... 100 lbs. (45 Kg)

Ordering information

AR0010 (DE100) Single Station Dereeler

DE500 Five Station Dereeler

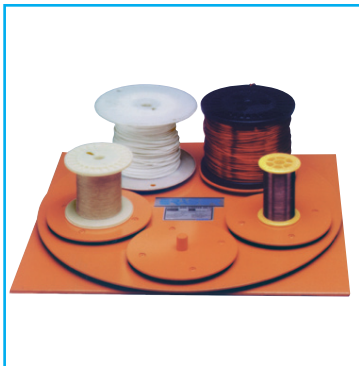

This free-running, five station dereeler will hold up to five 50 lb. (23 Kg) reels and is perfect for all dereeling applications.

Specifications

Turntable Diameter 18-1/4" (464mmØ)
Individual Turntable Diameter 6-1/2" (165mmØ)
Overall Size 16-5/8" x 18-3/8"
(422mm x 467mm)
Max. reel weight..... Five 50 lbs. (23 Kg) reels

Ordering Information

AR0015 (DE500) Five Station Dereeler

DE400 Bench Mounted Dereeler



Bench mounted, this unit adjusts for reel hub diameter for various sizes up to 50lb.

Specifications

Max. Reel dia 19" (483mmØ)
Max. Reel width..... 6" (152mm)
Min. Reel hub dia..... 11/16" (17.5mmØ)
Max. Reel hub dia..... 6" (152mmØ)
Max. reel weight..... 50 lbs. (23 Kg)
Overall Size 13" x 10" x 6"
(330mm x 254mm x 152mm)
Weight 10 lbs. (4.5 kg)

Ordering information

AR3801 (DE400) Reeler and dereeler

Optional Parts

IR0491 Bench stand
IR0492 Floor stand
TR4400 Extension Kit
Extends Reel width from 6"(152mm) to 10"(254mm)

Whether you're working with coaxial, extruded, or magnet/enamel wire or cable, Eraser offers a wide range of stripping options. Designed to our exacting specifications to meet your specific needs, our complete line of blade, thermal, or chemical strippers features more than 40 products. And if you can't find it in our standard product line, we can custom build one for you!

JCS Cable Strippers



Adjustable depth swivel blades allow easy peel-off of insulation, even for cables with tightly molded insulation.

Specifications

Stripping range (over insulation)
 JCS35 1" to 1-3/8" OD (25mm to 35mmø)

Ordering information

DE0035 (JCS35) Hand Tool
(While supplies last)
 CL0105 (JCSBL) Replacement Blade

LS10, LSR10 & LSS10 Cable Strippers



Hand operated with blades that are quickly changed and adjusted, these strippers provide a clean strip in one simple motion.

Specifications


Max. diameter of conductor (all) 1.120" OD (30.5mmø)
 Max. diameter of jacket (LS10) 1.25" OD (31.8mmø)
 Max. diameter of jacket (LSR10) 1.06" OD (26.9mmø)
 Max. strip length*(all) 3.4" (86.4mm)

Ordering information

AR0240 (LS10) standard cable clamps
 AR0260 (LSR10) rubber covered cable clamps
 to prevent marking the cable

**Strip length maximum is for one cycle of the machine. Dependent on cable type and size, strip length may be increased by cycling the machine more than once.*

LSA20 & LSAR20 Cable Stripper

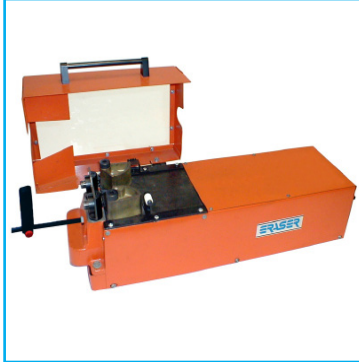

These air-operated units are for precise wire and cable stripping, with blade options available to cover most applications.

Specifications

Max. diameter of conductor 1.20" OD (30.5mmØ)
 Max. diameter of jacket..... 1.25" OD (31.8mmØ)
 Max. strip length*3.4" (86.4mm)
 Operation air operated, 90 P.S.I.

Ordering information

AR6800 (LSA20)..... standard serrated cable clamps
 AR6700 (LSAR20)..... with rubber covered cable clamps to prevent marking the cable

Optional Parts

PR0003 air filter, regulator and lubricator
 PR3623 six-foot air hose with quick disconnect

**Strip length maximum is for one cycle of the machine. Dependent on cable type and size, strip length may be increased by cycling the machine more than once.*

LS10, LSR10, LSS10, LSA20 & LSAR20 Die blade selection (one required)

	<i>Diameter of die</i>
IR1702	parallel blades
IR1728	0.030" OD (< 0.76mmØ)
IR1728	0.029-0.042" OD (0.74-1.07mmØ)
IR1728	0.043-0.050" OD (1.09-1.27mmØ)
IR1707	0.063-0.074" OD (1.60-1.88mmØ)
IR1708	0.075-0.102" OD (1.91-2.59mmØ)
IR1709	0.103-0.123" OD (2.62-3.12mmØ)
IR1710	0.124-0.142" OD (3.15-3.61mmØ)
IR1711	0.143-0.183" OD (3.63-4.65mmØ)
IR1712	0.184-0.208" OD (4.67-5.28mmØ)
IR1713	0.209-0.237" OD (5.31-6.02mmØ)
IR1714	0.238-0.285" OD (6.05-7.24mmØ)
IR1715	0.286-0.327" OD (7.26-8.31mmØ)
IR1716	0.328-0.370" OD (8.33-9.40mmØ)
IR1717	0.371-0.416" OD (9.42-10.57mmØ)
IR1718	0.417-0.448" OD (10.59-11.38mmØ)
IR1719	0.449-0.495" OD (11.40-12.57mmØ)
IR1720	0.496-0.558" OD (12.60-14.17mmØ)
IR1721	0.559-0.620" OD (14.20-15.75mmØ)
IR1722	0.621-0.714" OD (15.77-18.14mmØ)
IR1723	0.715-0.792" OD (18.16-20.12mmØ)
IR1724	0.793-0.870" OD (20.14-22.10mmØ)
IR1725	0.871-0.948" OD (22.12-24.08mmØ)
IR1726	0.949-1.026" OD (24.10-26.06mmØ)
IR1727	1.027-1.120" OD (26.09-28.45mmØ)
IR1728	custom blade set

Optional Parts

IR8371table and clamp assembly
 IR1507 length stop

L4 & L4A Portable Insert Wire Strippers



Removes most types of film insulation, these portable units allow close-up stripping flush to a coil body or bobbin.

L4, L4A Specifications

Wire size (dependent on insert selected)
 L4 29 to 8 AWG (0.28mm to 3.25mmø)
 L4A 8 to 4 AWG (3.25mm to 5.18mmø)
 Max. strip length 3" (76.2mm)
 no strip length stop available
 Power air operated

Ordering information

AR0180 (L4) rotary stripper, 90 P.S.I.
 AR0190 (L4A) rotary stripper, 90 P.S.I.
 PR3623 Six-foot Air Hose with quick disconnect

L2S, L2AS, L4, L4A, PL3S Insert selection (one required)

Wire Size	Heavy Duty Grade Inserts			Machine Used On
	Concave Face	Flat Face	Bullet Nose	
29-24 AWG (0.28-0.51mmø)	L30HC-IR1951	L30HF-IR1961	L30HB-IR1981	L1, L2S, PL3S, L4
24-20 AWG (0.51-0.81mmø)	L35HC-IR1952	L35HF-IR1962	L35HB-IR1982	
20-16 AWG (0.81-1.30mmø)	L31HC-IR1953	L31HF-IR1963	L31HB-IR1983	
15-13 AWG (1.45-1.83mmø)	L33HC-IR1954	L33HF-IR1964	L33HB-IR1984	
13-11 AWG (1.83-2.31mmø)	L38HC-IR1955	L38HF-IR1965	L38HB-IR1985	
11-9 AWG (2.31-2.90mmø)	L34HC-IR1956	L34HF-IR1966	L34HB-IR1986	L2S, L4
9-8 AWG (2.90-3.25mmø)	L37HC-IR1957	L37HF-IR1967	N/A	L2AS, L4A, IR0106
8-6 AWG (3.25-4.11mmø)	L39HC-IR1958	L39HF-IR1968	N/A	
5-4 AWG (4.62-5.18mmø)	L40HC-IR1959	L40HF-IR1969	N/A	

Wire Size	Carbide Tipped Inserts			Diamond Tipped Insert	Machine Used On
	Concave Face	Flat Face	Bullet Nose	Flat Face	
29-24 AWG (0.28-0.51mmø)	L30CC-IR9007	L30CF-IR9008	L30CB-IR9009	L30DF-IR9010	L1, L2S, PL3S
24-20 AWG (0.51-0.81mmø)	L35CC-IR9017	L35CF-IR9018	L35CB-IR9019	L35DF-IR9020	
20-16 AWG (0.81-1.30mmø)	L31CC-IR9027	L31CF-IR9028	L31CB-IR9029	L31DF-IR9030	
15-13 AWG (1.45-1.83mmø)	L33CC-IR9037	L33CF-IR9038	L33CB-IR9039	L33DF-IR9040	
13-11 AWG (1.83-2.31mmø)	L38CC-IR9047	L38CF-IR9048	L38CB-IR9049	L38DF-IR9050	L2S, IR0104, L4
11-9 AWG (2.31-2.90mmø)	L34CC-IR9057	L34CF-IR9058	N/A	L34DF-IR9060	
9-8 AWG (2.90-3.25mmø)	N/A	N/A	N/A	N/A	L2AS, L4A, IR0106
8-6 AWG (3.25-4.11mmø)	N/A	N/A	N/A	N/A	
5-4 AWG (4.62-5.18mmø)	N/A	N/A	N/A	N/A	

PD9 Portable Air-Operated Stripper



This compact, lightweight tool quickly strips film type insulation from round and rectangular wires.

Specifications

Wire size 32 to 4 AWG (0.20 to 5.18mmø)
 Square & rectangular wire up to 1/4" x 3/4" (6.35mm x 19.05mm)
 Strip length unlimited
 Hose 6' (1.8M) of 3/8" OD (9.5mmø) air hose
 Power 15,000 RPM, air motor requiring up to 90 PSI at 32 CFM

Ordering information

AR4000 (PD9) air operated stripper

Optional Parts

PR0003 air filter, regulator and lubricator
 PR3623 six foot air hose with quick disconnect
 Contact customer service or website for wheel selection.



AVIONICS / AEROSPACE · AUTOMOTIVE · CONSUMER APPLIANCE · ELECTRICAL / ASSEMBLY · MEDICAL / DENTAL · ELECTRONICS · UTILITIES · PLASTICS · RECREATIONAL · TELECOMMUNICATIONS

The Eraser Company has provided solutions for many companies by modifying our existing products or designing a one-of-a-kind product tailored to your specifications using our Product Customization Service. *We can help you too!* Simply complete the form, include details of your production problem, and fax or mail it to the attention of our Custom Products Department.

Company Name _____

Contact _____ Email Address _____

Phone _____ Fax _____

Address _____

City _____ State _____ Zip _____ Country _____

If you require a signed Confidentiality Agreement before providing information about your project, please download a copy of the Non-Disclosure Agreement found on our website at www.eraser.com. If the form is acceptable please fill in the blanks and fax or mail it to us. We will sign and return it to you immediately.

If this agreement is not acceptable and you have your own agreement, please fax, mail, or e-mail a copy to us for our review.

1. Please provide us with as MUCH DETAIL as possible regarding your Application, Idea or Concept.

2. Please provide a Separate Page with your Specification Drawing of the Application, Idea or Concept.

3. If you have Material Samples or Part Prototypes, please include them and send to:

**The Eraser Co. Inc.
Product Customization Department
123 Oliva Drive
Mattydale, NY 13211**

The Eraser Company, Inc.
PO Box 4961, Oliva Drive
Syracuse, New York 13221 ~ USA

Toll Free: 800.724.0594 {USA & Canada only}
Phone: 315.454.3237
Fax: 315.454.3090
eraser.com • info@eraser.com

The logo for ERASER is rendered in a bold, blue, italicized sans-serif font. The letters are outlined in white, giving it a three-dimensional appearance. The 'E' and 'R' are particularly stylized with horizontal bars. The logo is positioned in the bottom right corner of the page, above the tagline.

Always Moving Forward[®]